


- NiCad Memory Backup
- Count/Hold Function
- Programmable Input Divider
- 1/8 DIN Size
- Bright LED Display
- Screw Terminals Standard
- 110/220 VAC Power




SPECIFICATIONS

Counting Range	0-99999999
Count/Hold Function	Short HOLD to ground to hold count
Reset	Manual, via front panel pushbutton Electronic, via rear panel input (short RESET to ground to reset meter)
Input	TTL, CMOS or Contact Closure, internally switch selectable
Input Frequency	1KHz max.
Input Divider	Internally selectable divide by 1 to 255
Count Memory	3000 hour NiCad battery backup
Display	0.36" high RED LED
Operating Temp	0 - 60 deg C
Power Supply	110/220 VAC +/-10%, 50/60 Hz

CONNECTION DIAGRAM

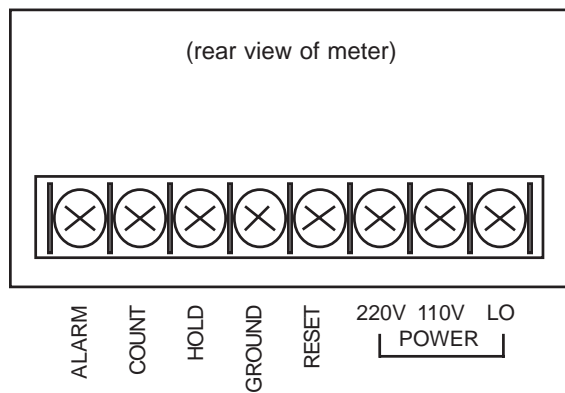

DIMENSIONS

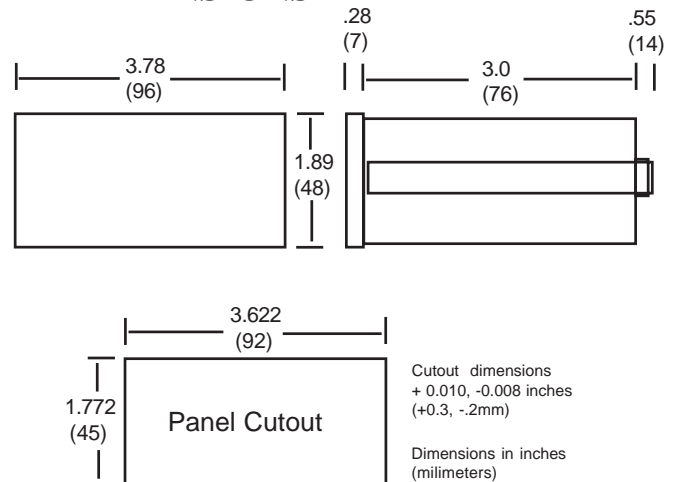

DIGITAL COUNTER WITH ALARM

CM-8A